




BARRIER GARD GT8 VALUE PROPOSITION

Application field, mechanical characteristics and new functionalities



- Application from **4 m up to 7,8 m** clearance
- Design for **Heavy Duty cycle**.
- Models with power supply **230Vac or 120Vac** versions.
- New **24Vdc motor with encoder** with heavy duty brushes.
- **Compliant with EN standards**: the GARD GT can easily pass successfully the impact tests.
- Great durability **MCBF up to 3 millions**.
- Opening **Speed: 4-8 secs.** with 4 to 8-meter boom.
- Multifunction control board with **Digital inputs and CXN BUS input**.
- **CAME Connect Ready** electronics and **CAME KEY slot** for smart setup
- Boom and Crown **Red/Green LED** integration for traffic flows control.
- Manages **up to 250 users** with RFID card, or digital code, or transmitters.
- New accessories and **full height skirt** (upside/downside) available.

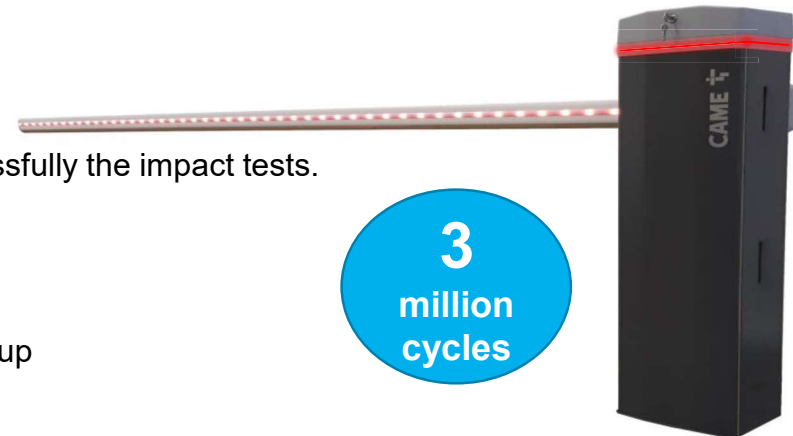

3
million
cycles